





EC

AC PLASTIC DOMESTIC FANS Automatic Shutter

Automatic shutter option. Shutter opens once the fan is in use, it close itself automatically once the fan switch off. Panel is thin and tight so that it is mounted solid. Silent and strong against corrosion. Motor's life is long against the environmental factors.

Technical Drawing

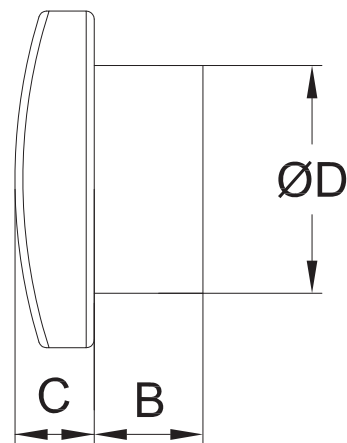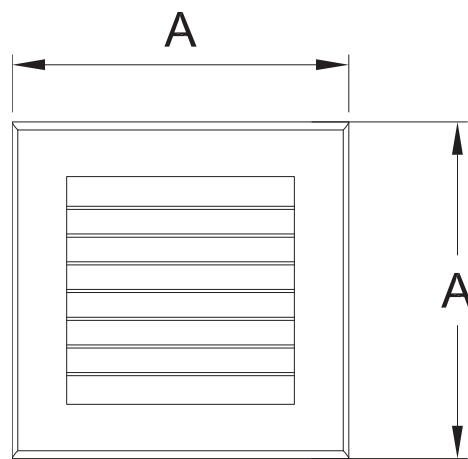

- MATERIAL** : ABS plastic material. Impeller's design and dynamic balance provides a high air performance and silence. Thanks to it's special surface, never shine and change it's color. Protection against wet and oxidation.
- INSULATION CLASS** : Class B
- DIRECTIVE** : EN 60335-1, EN 60335-2-80
- SPEED CONTROL** : Speed can be adjusted using an optional controller.
- APPLICATION AREAS** : Bathrooms, kitchens, meeting rooms, offices etc. areas where silence and strength against corrosion is asked.

TYPE	A	B	C	D
EC 1010E	150	45	35	97
EC 1219E	170	55	44	118
EC 1530E	210	73	60	149

Dimensions are in (mm)

TYPE	VOLTAGE	FREQUENCY	POWER	CAPACITOR	SPEED	AIR FLOW	SOUND PRESSURE LEVEL	WEIGHT
	V	Hz	W	(µF)	rpm	m ³ /h	dB(A)	kg
EC 1010E	230	50	15	-	2300	105	40	0.81
EC 1219E	230	50	22	-	2250	195	41	0.91
EC 1530E	230	50	25	-	2100	300	43	1.31

