




BKEF-R

AC KITCHEN EXHAUST FANS Backward Curved

Removable panels provide flexibility on air flow direction.
Suitable mounting at each mounting position.
Safe and no maintenance needed.
Panels with double walls are manufactured of 20mm mineral wool isolated galvanize sheetsteel.

Technical Drawing




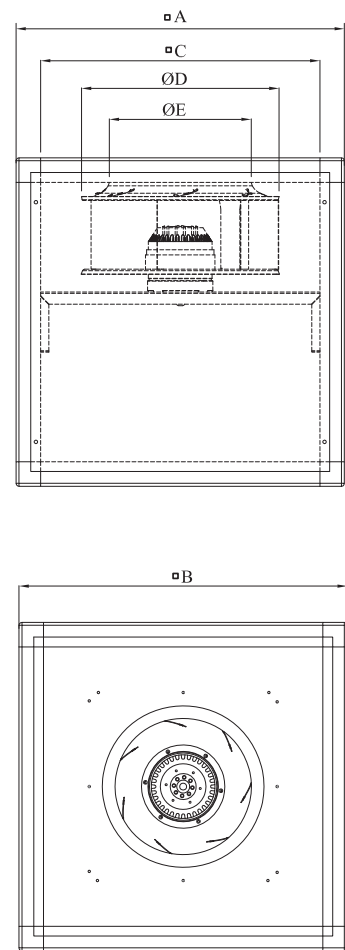


- MATERIAL** : Casing is made of galvanized sheet metal, fan with backward curved impeller is made of aluminium
- INSULATION CLASS** : Class F
- MAX. HAVA TAŞINIMI** : 50°C
- DIRECTIVE** : EN 60335-1, EN 60335-2-80, EN 12101-3
- SPEED CONTROL** : Speed can be adjusted using an optional controller.
- APPLICATION AREAS** : BKEF-R fan series are perfect to use in residential, commercial, and industrial environments, especially where pressured air is needed to be transferred. They are widely used in industrial kitchens, cafes and restaurants, as well as gymnasiums, shopping centers, hospitals, factories, offices etc. They are also used in Air Handling Units (AHU) for air supply.

TYPE	A	B	C	D	E
BKEF-R 400	670	670	548	405	253
BKEF-R 450	670	670	548	405	253
BKEF-R 500	670	670	590	504	321
BKEF-R 560	800	800	720	570	361

Dimensions are in (mm)

TYPE	VOLTAGE	FREQUENCY	POWER	SPEED	AIR FLOW	SOUND PRESSURE LEVEL	WEIGHT
	V	Hz	W	rpm	m ³ /h	dB(A)	kg
BKEF-R 400	230/380	50	750	1330	4000	40	36
BKEF-R 450	230/380	50	750	1330	5500	46	40
BKEF-R 500	230/380	50	1500	1330	7500	50	51
BKEF-R 560	230/380	50	2200	1330	10000	53	65

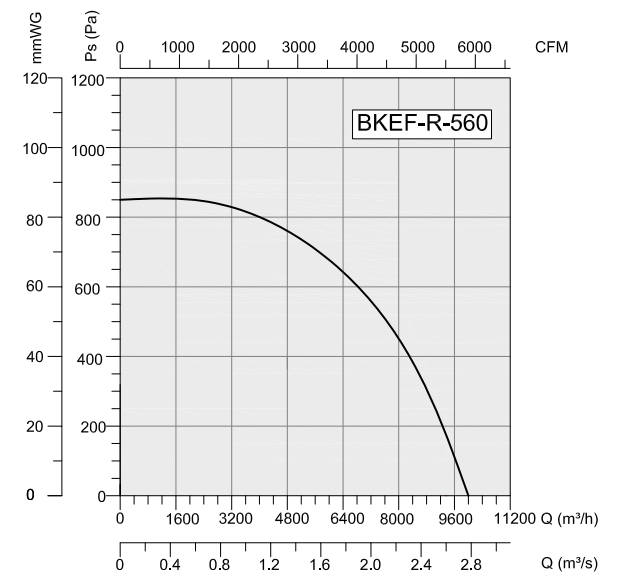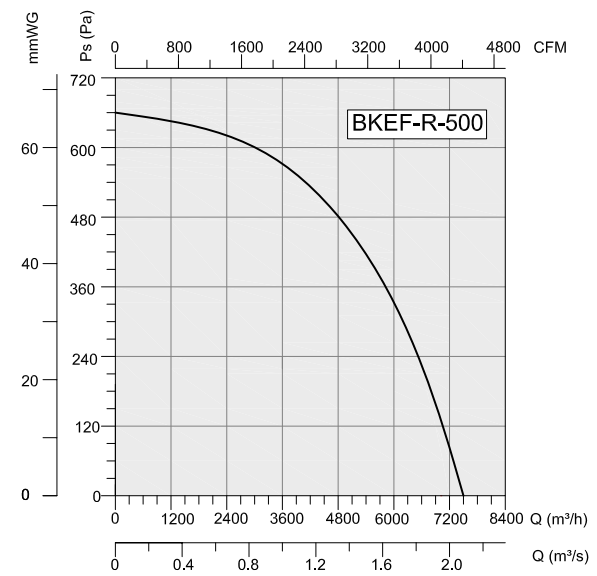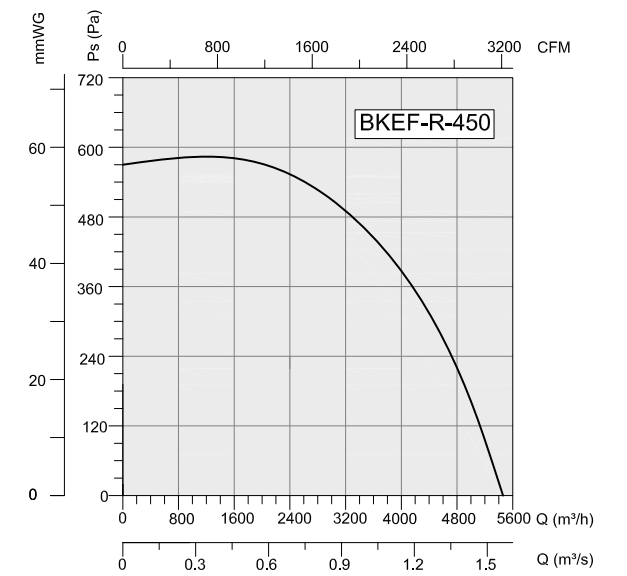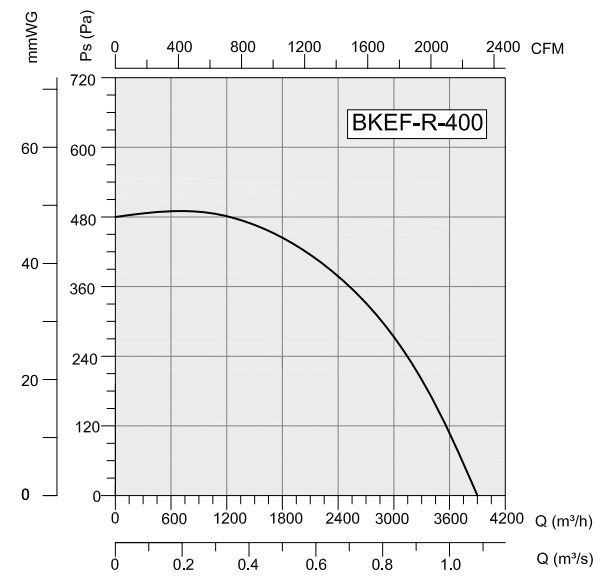

Accessories



BSC-F BDH



BDEB

